


## GSD 1 Door Standalone Fingerprint Switch



### Main Features

- 1 Door
- 35 Users
- Door Monitoring via Door Contact
- Tamper Resistant
- Interlock
- Easy Programming
- Programmable Settings:
  - Programming Code
  - Relay Active Time
  - Scan Mode
  - Silent or Audible Operation
  - Keypad Backlight
- Indoor/Outdoor Use - IP 65
- Robust Polycarbonate Housing
- Mounts onto Standard Electrical Patress Box or flush mounts onto a wall
- 2 Year Warranty.

### Wiring Layout

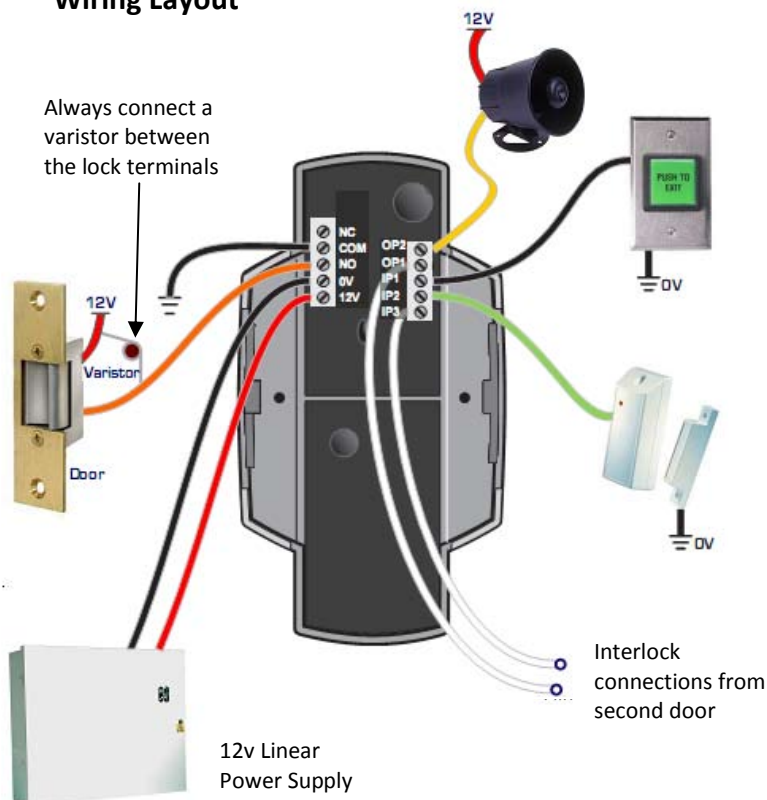

### Technical Specification

- Power Supply 12V DC
- Current consumption 100mA
- Current consumption with load (max) 130mA
- Relay Contact Rating 5 Amps /240V ac
- Operating Temperature 0 C to +60 C
- Moisture Resistance IP 65

### Dimensions

- Surface Mount **W.** 87mm **D.** 35mm **H.** 160mm

**Ireland:** Global Security Devices Ltd. S12-14 Synergy Centre, ITT Dublin, Dublin 24, Phone: +353 (1) 5242690, info@globalsecurity.ie

**UK:** Global Security Devices UK, Centre Court 1301 Stratford Road, Hall Green, Birmingham B28 9HH, +44(0)845 643