


GSD Wi-Bio



Main Features

- Used with GSD Wi-Plus & GSD Wi-Enterprise Controller
- Monitors and Controls 1 Door
- Supports Wireless or RS485 Networks
- 10000 Users (Fingerprint)depending on controller
- Programmable sensor scan mode
- 128 User Groups
- 128 Time Zones
- Challenge facility
- Local Proximity Reader (Clock & Data)
- Tamper protection
- Tamper Output extendable to Intruder Panel
- Easy Programming via GSD Software
- Standard, Toggle & Manager Users
- Intruder & Fire Alarm Interface
- Interlock
- Anti-Tailgate
- Keypad Backlit
- 1 x 5amp Relays 240vac
- 3 Inputs - 1 Programmable (7 Options)
- 2 Outputs - 1 Programmable
- Key Programmable Features:
 - Door Timers
 - Timed Actions
 - Door Options
 - Alarm Options
 - User Groups
 - Door Groups
 - Time Zones
- Robust Polycarbonate Housing
- Stainless Steel Keys
- Mounts onto standard Electrical Patress box and flush mounts onto a wall
- Indoor/Outdoor Use IP65
- 2 Year Warranty.

Wiring Layout

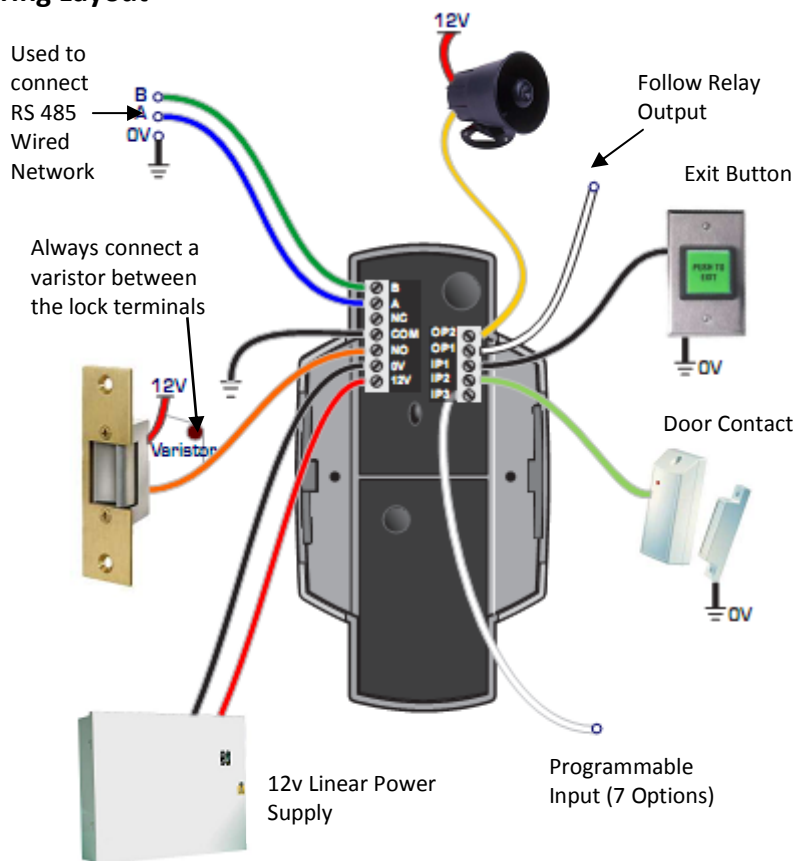

Technical Specification

- Supply 12 DC only
 - Current consumption 100mA
 - Current consumption with load (max) 140mA
 - Relay Contact Rating 5 Amps /240V ac
 - Operating Temperature 0C to +60 C
 - Moisture Resistance IP 65
- Dimensions – Surface or Flush Mount
- **W. 87mm D. 35mm H. 160mm**

Ireland: Global Security Devices Ltd. S12-14 Synergy Centre, ITT Dublin, Dublin 24, Phone: +353 (1) 5242690, info@globalsecurity.ie
UK: Global Security Devices UK, Centre Court 1301 Stratford Road, Hall Green, Birmingham B28 9HH, +44(0)845 643